


商品コード	品番	規格	寸法(mm)			適用電線範囲(mm)	出荷単位
			L	φD	φd1		
690-350-02580	B-1.25 JP	  	15.0	3.3	1.7	0.25~1.65	100個 (1箱)
690-350-02590	B-2 JP	  		4.1	2.3	1.04~2.63	
690-350-02600	B-5.5 JP	  		5.4	3.4	2.63~6.64	
690-350-02610	B-8 JP	  	21.0	7.0	4.5	6.64~10.52	
690-350-02620	B-14 JP	  	26.0	8.9	5.8	10.52~16.78	
690-350-02630	B-22 JP	  	29.0	11.3	7.7	16.78~26.66	
690-350-02640	B-38 JP	  	32.0	13.2	9.4	26.66~42.42	1個
690-350-02650	B-60 JP	  	36.0	15.3	11.4	42.42~60.57	
690-350-02660	B-70 JP	 	37.0	17.5	13.3	60.57~76.28	
690-350-02670	B-80 JP	 	38.0	19.5	14.5	76.28~96.3	
690-350-02680	B-100 JP	  		22.1	16.4	96.3~117.2	
690-350-02690	B-150 JP	  	54.0	26.4	19.5	117.2~152.05	
690-350-02700	B-180 JP	 	57.0	28.5	21.0	152.05~192.6	
690-350-02710	B-200 JP	  	63.0	32.4	24.0	192.6~242.27	
690-350-02720	B-250 JP	 		35.0	26.0	250	
690-350-02730	B-325 JP	  	72.0	37.0	28.0	242.27~325	

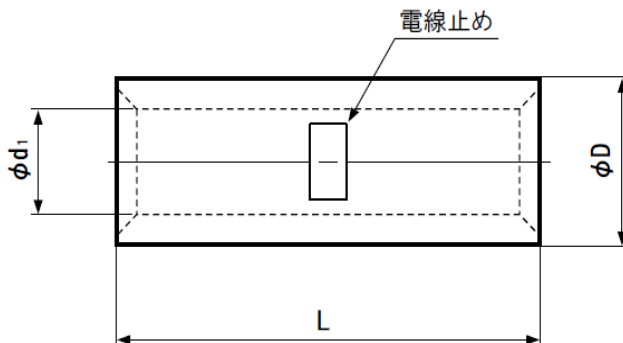

 E42024  LR20812  JQ0607002 / JIS C 2806

① 番号	部品名			1 数量	無酸素銅／すずめっき 材料&寸法&処理	記事
	設計	製図	検査	承認	図名	
	村井 8.Dec.'22	渡辺 8.Dec.'22	木目 8.Dec.'22		裸圧着スリーブ 突合せ用 (B形)	商品コード：表参照
三角法	単位 mm	尺度 FREE			因幡電機産業株式会社 商品統括部 JAPPY部	図番：B-xxx-JP-001