



商品コード	品番	規格	寸法(mm)								適用電線範囲	出荷単位
			ød2	B	L	F	E	øD	ød1	T		
690-350-03900	80-12 JP		13.0	27.0	54.2	20.7	20.0	19.5	14.5	2.3	単線:9.27~10.41mm より線:76.28~96.3mm AWG #3/#0	1個
690-350-01870	100-8 JP		8.4	28.5	55.6	20.4	21.0	22.3	16.4	2.6	単線:10.41~11.68mm より線:96.3~117.2mm AWG: # 4/ # 0	
690-350-01880	R 100-10 JP		10.5									
690-350-01890	R 100-12 JP		13.0									
690-350-01900	R 100-14 JP		15.0	32.0	69.0	32.0						
690-350-01910	R 100-16 JP		17.0									
690-350-01920	R 100-18 JP		19.0									
690-350-01930	R 100-20 JP		21.0									
690-350-04000	150-8 JP		8.4	36.0	66.0	23.0	27.0	26.5	19.5	3.2		単線:11.68~13.8mm より線:117.2~152.05mm AWG: # 250/300MCM
690-350-01940	R 150-10 JP		10.5			21.0						
690-350-01950	R 150-12 JP		13.0									
690-350-01960	R 150-14 JP		15.0		68.0	23.0						
690-350-01970	R 150-16 JP		17.0									
690-350-01980	R 150-18 JP		19.0		81.0	36.0						
690-350-01990	R 150-20 JP		21.0									

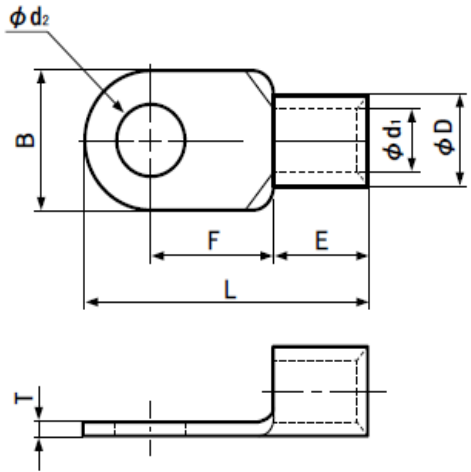

①				1	無酸素銅／すずめっき	
番号	部品名			数量	材料&寸法&処理	
設計	製図	検査	承認	図名		品番: 表参照
✕	村井 8.Dec.'22	渡辺 8.Dec.'22	木目 8.Dec.'22	裸圧着端子 丸形(R形) 80~150		商品コード: 表参照
三角法	単位 mm	尺度 FREE		因幡電機産業株式会社 商品統括部 JAPPY部		図番: Rxxx-xx-JP-E-001